

# OPPLE LED PANEL





## LED Panel Zenith Upgrade

### Features

- Unique, see-through design
- Omnidirectional light emission
- Professional batwing light distribution
- 30000 HR lifetime
- Compatible with Opplle 1-10V, Dali & BT control module

### Benefits

- Easily matches different decoration style
- Offers more comfortable light, with the whole space being lit up brightly and evenly
- Ensures the even distribution of illumination surface, minimize the quantity of luminaires needed for same area
- Minimizes maintenance with long lifespan and low failure rate
- Flexible and easily upgradeable to intelligent application

### Application



### Specification

Item Code	Item Description	Power (w)	Power Factor	Lumen (lm)	Efficacy (lm/W)	Input Current (mA)	CRI	CCT (K)	Lifetime (L70B50)	MOQ (pcs)
140061356	LEDPanelSp-Z L1222-40W-4000-TR-GP	40	0.95	4000	100	370	≥80	4000	30Khrs	100
140061357	LEDPanelSp-Z L1222-40W-5700-TR-GP	40	0.95	4000	100	370	≥80	5700	30Khrs	100
140061358	LEDPanelSp-Z L1222-75W-4000-TR-GP	75	0.98	7500	100	370	≥80	4000	30Khrs	100
140061359	LEDPanelSp-Z L1222-75W-5700-TR-GP	75	0.98	7500	100	370	≥80	5700	30Khrs	100

#### Technical Specifications

On / Off Cycles	50000
Colour Consistency (SDCM)	6
Dimmable	No
Beam Angle (°)	156
Finishing Colour	Silver
IP	IP20
IK	IK02
Driver integrated (Yes/No)	No
Glow wire test	850°C
Driver Failure Rate	1% at 5000h
Weight (kg/pc)	4.00/4.10

#### Electrical Supply

Frequency (Hz)	50 / 60
Voltage (V)	220-240V
AC / DC	AC


#### Mechanical Finishing Properties

Optical Material	PMMA
Housing Material	Aluminum

#### Application Conditions

Operating Temperature	-10-45°C
Application Temperature	25°C
Storage Environment	-25°C-50°C


CE CB

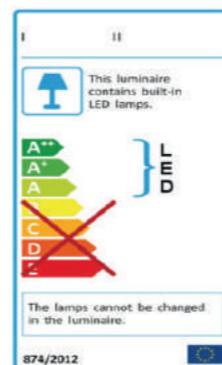

### Packaging Information

Item Code	Item Description	Single Box(1pc/box)		Packaging Unit		
		Dimensions(mm) (LxWxH)	Gross Weight (kg)	Dimensions(mm) (LxWxH)	Gross Weight (kg)	Packing Qty (pcs/unit)
140061356	LEDPanelSp-Z L1222-40W-4000-TR-GP	1332x348x92	5.526	1	5.526	1
140061357	LEDPanelSp-Z L1222-40W-5700-TR-GP	1332x348x92	5.526	1	5.526	1
140061358	LEDPanelSp-Z L1222-75W-4000-TR-GP	1332x348x92	5.626	1	5.626	1
140061359	LEDPanelSp-Z L1222-75W-5700-TR-GP	1332x348x92	5.626	1	5.626	1

### Dimensional Drawing

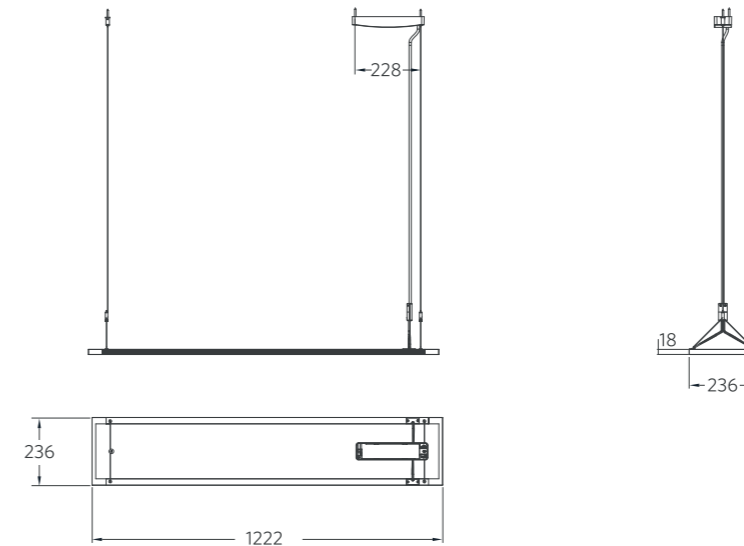

### Photometric Data

